


# Decoupling inductor

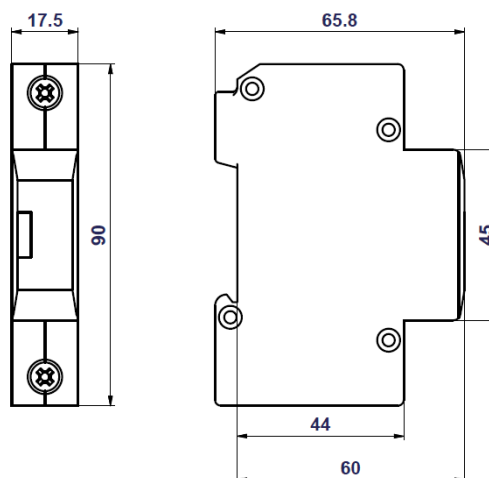

## HI16/15

**Decoupling inductors are intended for rated load current 16A.** These inductors, sometimes also called decoupling impedance, ensure the energy coordination between the arresters type 1 and type 2 or the arresters type 2 and type 3 according to IEC EN 62305 and IEC EN 61643-11, especially in the places where there is no adequate distance between the arresters (e.g. when there are two successive arrester types placed in one switchboard). If the energy coordination of surge protection is not achieved, the lightning current impulse can damage some arrester type of the protection cascade. If there is at least 5m distance between two successive arrester types (in case of two successive arrester types in two different switchboards), this section impedance can be considered as adequate.

Typ		HI16/15
Nominal voltage	$U_N$	500 V AC
Rated load current	$I_L$	16 A
Inductance	L	15 $\mu$ H $\pm$ 10 %
Resistance (in direct current)		< 0,01 $\Omega$
Housing material		Polyamid PA6, UL94 V-0
Degree of protection of enclosure		IP20
Operating temperature	$\vartheta$	-40°C ... +70 °C
Cross-section of the connected conductors (at tightening moment of clamps 3 Nm)		6 mm <sup>2</sup>
Max. back-up fuse		16 A
Lifetime		min. 100 000 h
Weight	m	157 g
Article number		
HI16/15		<b>30 401</b>

